

Neon Neo – Large VB

Project Name:

Type No:

PRODUCT DESCRIPTION

- Flexible vertical bend >300mm LED ribbon.
- UV, flame, chlorine and salt resistant.
- Continuous length up to 20 metres.
- Colour temperature ranges from 2400K – 4000K.
- Ambient temperature -20°C to 45°C.
- Remote 24V constant voltage driver.



LUMINAIRE SPECIFICATION

Width:	20mm
Height:	18mm
IP Rating:	IP67
Cutting Increment:	White - 50mm Tuneable White / Warm dim – 62.5mm RGB – 62.5mm RGBW – 100mm
Max Length:	White Standard 5W - 20m single feed White Standard 10W - 15m single feed White High Output - 5m single feed Tuneable White Warm dim – 5m RGB – 13m RGBW – 10m

TECHNICAL

Life maintenance	L70 / B10 up to 50,000 hours
Output	Standard Output - 5W/m @ 270lm 10W/m @ 490lm High Output - 10W/m @ 870lm 13.5W/m @ 1220lm Tuneable white – 15W/m @ 760lm Warm Dim – 14W/m @ 540lm RGB – 12W/m RGBW – 16W/m
CRI / CCT	2400K / 2700K / 3000K / 4000K / Tuneable white / Warm dim / RGB / RGBW
Optics	Opal diffused
Drive current	Remote 24V DC constant voltage


CODE BUILDER

Model	Colour Temp	Wattage	Power Feed
Neo-L-VB	24 2400K	S5 5W/m @ 270lm	1 Bottom connector
	27 2700K	S10 10W/m @ 490lm	2 End connector
	30 3000K	H10 10W/m @ 870lm	3 Side (Left/Right) connector
	40 4000K	H13 13.5W/m @ 1220lm	
	TW Tuneable white (2700K-5500K)		
	WD Warm dim (1800K-3000K)		
	RGB		
	RGBW		

ACCESSORIES: Mounting clip or channel



18mm

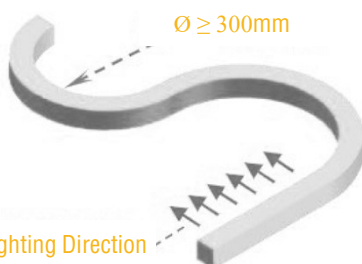

$\varnothing \geq 300\text{mm}$

Lighting Direction