

Project Name:

Type No:

PRODUCT DESCRIPTION

Flexible horizontal bend >120mm LED ribbon.

UV, flame, chlorine and salt resistant.

Continuous length up to 20 metres.

Colour temperature ranges from 2400K – 4000K.

Ambient temperature -20.C to 45.C.

Remote 24V constant voltage driver.

Five clips supplied per metre for curves. Channel supplied in metre lengths when straight. Bendable profile also available.

LUMINAIRE SPECIFICATION



Width:	15mm
Height:	15mm
IP Rating:	IP67
Cutting Increment:	White – Standard Output – 50mm White – High Output – 62.5mm Tuneable White Warm dim – 62.5mm RGB – 62.5mm
Max Length:	White Standard 5W - 20m single feed White Standard 10W - 15m single feed White High Output - 5m single feed Tuneable White Warm dim – 5m RGB – 5m

TECHNICAL

Life maintenance	L70 / B10 up to 50,000 hours
Output	Standard Output - 5W/m @ 290lm 10W/m @ 510lm High Output - 10W/m @ 920lm 13.5W/m @ 1290lm Tuneable white – 15W/m @ 800lm Warm Dim – 14W/m @ 560lm RGB – 12W/m
CRI / CCT	2400K 2700K 3000K 4000K @ CRI 90 Warm Dim 1800K-3000K Tuneable 2700K-5500K RGB
Optics	Opal diffused
Drive current	Remote 24V DC constant voltage
Dimming	Dimming options available to suit: Non Dim DALI 0-10V DMX Casambi

CODE BUILDER

Model	Colour Temp	Wattage	Power Feed
Neo-M-HB	24 2400K	S5 5W/m @ 290lm	1 Bottom connector
	27 2700K	S10 10W/m @ 510lm	2 End connector
	30 3000K	H10 10W/m @ 920lm	3 Side (Left/Right) connector
	40 4000K	H13 13.5W/m @ 1290lm	
	TW Tuneable white (2700K-6000K)		
	WD Warm dim (1800K-3000K)		
	RGB		

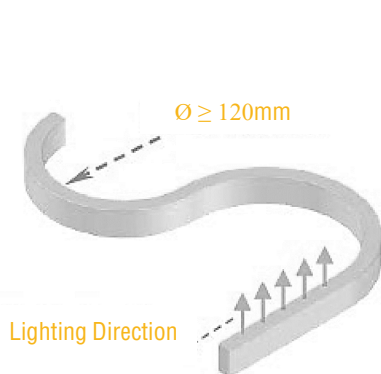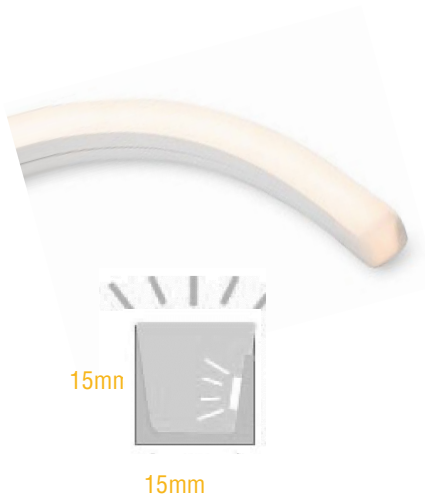

ACCESSORIES: Mounting clip or channel

