

Neon Neo – Medium VB

Project Name:

Type No:

PRODUCT DESCRIPTION

Flexible vertical bend >120mm LED ribbon.

UV, flame, chlorine and salt resistant.


Continuous length up to 20 metres.

Colour temperature ranges from 2400K – 4000K.

Ambient temperature -20°C to 45°C.

Remote 24V constant voltage driver.

Five clips supplied per metre for curves. Channel supplied in metre lengths when straight. Bendable profile also available.

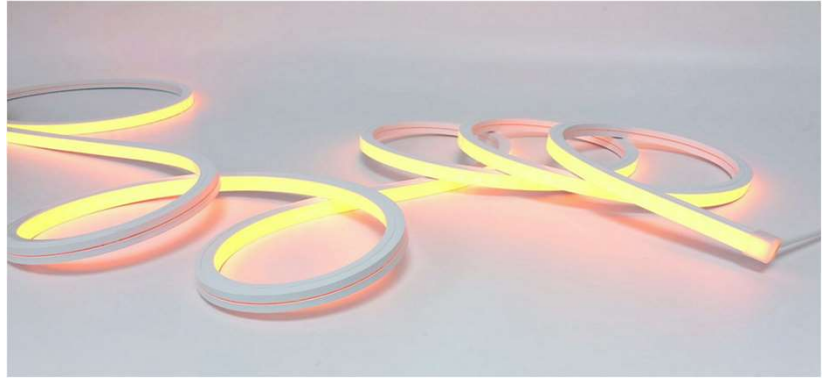

LUMINAIRE SPECIFICATION

Width:	15mm
Height:	15mm
IP Rating:	IP67
Cutting Increment:	White – Standard Output – 50mm White – High Output – 62.5mm Tuneable White Warm dim – 62.5mm RGB RGBW – 100mm
Max Length:	White Standard 5W - 20m single feed White Standard 12W - 15m single feed White High Output - 5m single feed Tuneable White Warm dim – 5m RGB – 13m RGBW – 10m

TECHNICAL

Life maintenance	L70 / B10 up to 50,000 hours
Output	Standard Output - 5W/m @ 170lm 12W/m @ 340lm High Output - 10W/m @ 550lm 13.5W/m @ 770lm Tuneable white – 15W/m @ 740lm Warm Dim – 14W/m @ 530lm RGB – 12W/m RGBW – 16W/m
CRI / CCT	2400K 2700K 3000K 4000K @ CRI 90 Warm Dim 1800K-3000K Tuneable 2700K-5500K RGB RGBW
Optics	Opal diffused
Drive current	Remote 24V DC constant voltage
Dimming	Dimming options available to suit: Non Dim DALI 0-10V DMX Casambi

CODE BUILDER

Model	Colour Temp	Wattage	Power Feed
Neo-M-VB	24 2400K	5 5W/m (white only)	1 Bottom connector
	27 2700K	12 12W/m (white only)	2 Front connector
	30 3000K		3 Side connector
	40 4000K		
	TW Tuneable white (2700K-5500K)		
	WD Warm dim (1800K-3000K)		
	RGB		
	RGBW		

ACCESSORIES: Mounting clip or channel



15mm

