


**Project Name:**

**Type No:**

**PRODUCT DESCRIPTION**

Flexible horizontal bend >50mm LED ribbon.  
 UV, flame, chlorine and salt resistant.  
 Continuous length up to 10 metres.  
 Colour temperature ranges from 2400K – 4000K.  
 Ambient temperature -20°C to 45°C.  
 Remote 24V constant voltage driver.  
 Five clips supplied per metre for curves. Channel supplied in metre lengths when straight. Bendable profile also available.

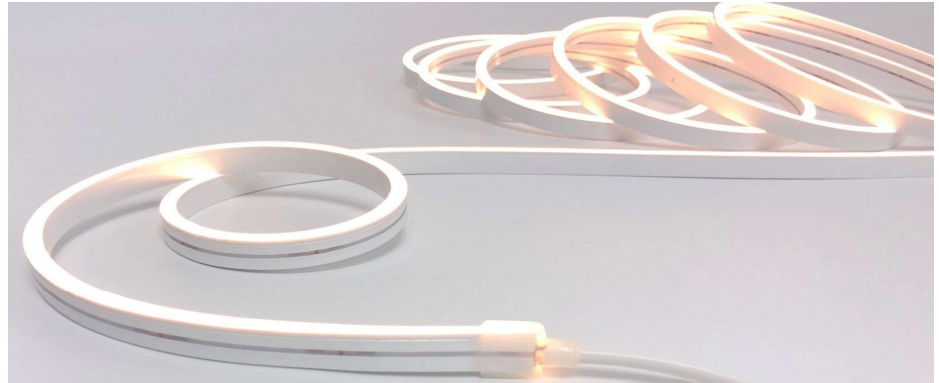

**LUMINAIRE SPECIFICATION**

Width:	5mm
Height:	10mm
IP Rating:	IP67
Cutting Increment:	50mm
Max Length:	Standard Output 5W - 10m single feed Standard Output 10W - 5m single feed High Output 10W - 10m single feed

**TECHNICAL**

Life maintenance	L70 / B10 up to 50,000 hours
Output	Standard Output - 5W/m @ 130lm   10W/m @ 230lm High Output - 10W/m @ 310lm
CRI / CCT	2400K   2700K   3000K   4000K @ CRI 90
Optics	Opal diffused
Drive current	Remote 24V DC constant voltage
Dimming	Dimming options available to suit: Non Dim   DALI   0-10V   DMX   Casambi

**CODE BUILDER**

Model	Colour Temp	Wattage	Power Feed
Neo-S-HB	24 2400K	S5 5W/m @ 130lm	1 End connector
	27 2700K	S10 10W/m @ 210lm	
	30 3000K	H10 10W/m @ 310lm	
	40 4000K		

Example Neo-S-HB-27-S5-1

**ACCESSORIES:** Mounting clip or channel

